



## CHARACTERISTICS

**DESCRIPTION:** UNBLEACHED TEXTURE

**COMPONENTS:** GLUED AND STARCHED UNBLEACHED FABRIC

**GRAMMAGE:** 200 g/m<sup>2</sup>

**INK:** GREENGUARD GOLD CERTIFIED PRODUCT

**REACTION TO FIRE:** CLASS B-s1, d0

**TENSILE STRENGTH:** SP04/02/13 (ISO 4606)

**BREAKING LOAD:** AVERAGE WEFT VALUE 600 N/5 cm;

AVERAGE WARP VALUE 1000 N/5 cm

**ROLL WIDTH:** 95 cm

**THICKNESS:** 0,48 - 0,50 mm

**INTENDED USE:** RESIDENTIAL - COMMERCIAL - CONTRACT

### WALLPAPER CLEANING

Once resin-finished and dry, the wallpaper can be cleaned with normal neutral detergents.

In case of persistent dirt, similar solvents can be used.

Do not use acids that may affect the technical characteristics of the product.



APPLY ON SMOOTH SURFACES



PRIMER, GLUE, RESIN AND SEALER INCLUDED



PRODUCT WASHABLE WITH WATER



RESISTANT TO LIGHT ABRASION



FOR INTERIOR AND EXTERNAL WALLS, CEILINGS,  
WALLS DIRECTLY IN CONTACT WITH WATER

## CERTIFICATIONS



EN 15102



REACTION TO FIRE CLASSE B-s1, d0



INTERNATIONAL CERTIFICATION GUARANTEEING THE  
COMPANY'S COMMITMENT TO SUSTAINABLE PRODUCTION  
AND TO THE HEALTH AND SAFETY OF EMPLOYEES AND  
CONSUMERS



LOW CHEMICAL  
EMISSION CERTIFIED




THE CERTIFIED  
CHEMICAL IS SAFE

## IMPORTANT INFO

ALL GRAPHICS OF THE COLLECTIONS EXCEPT 24K CAN BE PRINTED.

Make sure that the wall is suitable for the installation and completely smooth. Level with the primer provided to seal the surface. Any irregularities or graininess must be removed from the surface so that the wallpaper adheres perfectly to the wall.

Not recommended for application on mortar and/or lime-based walls. Apply on painted white walls.

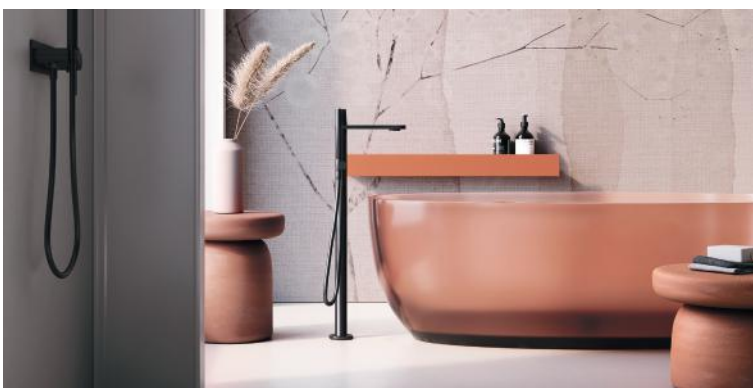

## VIDEO INSTALLATION INSTRUCTIONS

